

IR LED300-A-50

Home | Security | Lighting | Infrared

IR LED300-A-50

LED Infrared Illuminator 850nm, 50° 200-240VAC,

65W, Twilight Switch

Art-Nr. 71756



SLD Security & Communications

Main Features

Spectral emission: 850nm / Beam angle: 50°
292 LEDs with narrow-band light emission
Sensor controlled twilight switch w. IR cut filter
Integral switching power supply with softstart
Power supply: 200 to 240VAC, 50Hz
Efficiency factor: 97% (cos Phi >0.9)

Low self-heating / Vibration-resistant
Extended temperature range components included
Natural-coloured anodized aluminium casing
Protection rating: IP66
Option: fastening, wall and ceiling mount brackets

Specifications

Lamp type	LED
Spectral emission	850 nm
Spectral half-value range	80nm
Angle of light source h	50°
Angle of light source v	50°
Scene coverage	150 m
Twilight switch	yes, 50/130Lux (ON/OFF) sensor controlled. Permanent Illuminator function by sensor covering (adhesive tap supplied) or in case of sensor failure
Temperature related switch-off	At >60°C (system temperature). Automatic restart after falling below the limits
Isolation strength	Class I (leakage path =>4mm)
Efficiency factor	>97% (PSU), Cos Phi: >0,9
Switch-on delay	Softstart

IR LED300-A-50

(Continuation Specifications)

Heating above ambient air temperature	Max. 35°C
Connection	2m Mains connection cable with open ends
Power supply unit	integrated
Protection rating	IP66
Mount	2x Threads M6 (Bottom), 2x M8 for wall kit fixing
Supply voltage	200 ~240VAC +/-10%, 50Hz
Power consumption	65W
Temperature range (operation)	-30°C ~+50°C
Housing ventilation	Via air vent
Housing	Aluminium with plastic cover
Colour	Housing: anodized silver / Black cover
Dimensions (HxWxD)	see drawing
Weight	3.1kg

Optional accessories

71725	LED-WBSET	Wall Mount Set: Mounting Bracket and Wall Mount Bracket
79750	WD-5/MK	Wall Mount with Swivel Head for weatherproof Housing, black
77488	VPT/IRB-4L	L-Bracket for VPT-40, RAL7032
71722	PM-80	Pole Mount Adapter IR LED-WBSET (80-180mm Pole)

IR LED300-A-50


Product information

*) The best result will be achieved on condition that a camera is used with good sensitivity in the infra-red range, a relative lens aperture of F1.4 min. and a mean reflectance factor for spotlight objects.

IR LED300-A-50

Home | Security | Lighting | Infrared

Technical drawing

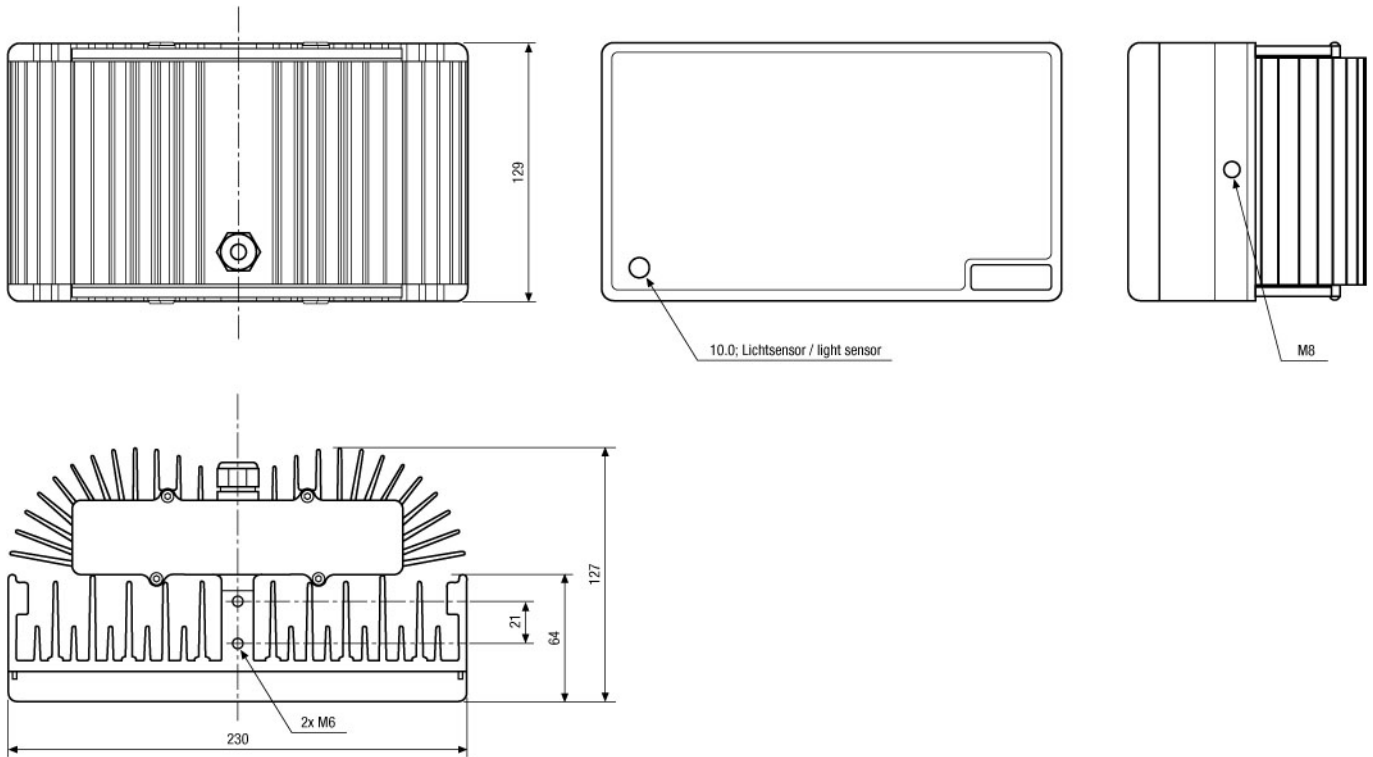

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

SLD Security &
Communications

