


VDA-4A

Home | Security | Processing | Distributors/Amplifiers

VDA-4A
Video Signal Distributor 1 Input, 4 Outputs,
in Housing, 230VAC

Art-Nr. 75101

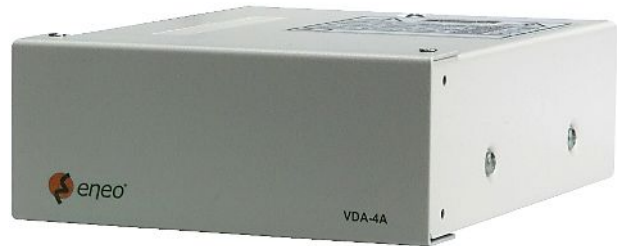

SLD Security &
Communications

Main Features

1 Input	Integrated Signal Pre-Equalization (HF Gain)
4 Outputs	Integrated Signal Pre-Amplification (Linear Gain)
Video Bandwidth: 10MHz (+/-3db)	Supply Voltage: 230VAC / 50Hz
Signal-to-noise Ratio: >55db	Colour: Pantone Cool Gray 1C

Specifications

Video standard	PAL/NTSC
Video inputs	1.0 ~2.0Vp-p (C)VBS, 75ohms, BNC
Video outputs	4x 1.0 ~2.0Vp-p, (C)VBS, 75ohms, BNC
Distributor configuration	1 input to 4 outputs
Video signal bandwidth	0 ~10MHz (+/-3db)
Tilt	≤ 1% at 50Hz
Internal adjustments	1 Potentiometer each for the stepless adjustment of the linear and HF gain
Signal pre-equalization range (HF gain)	0 ~6.0db stepless adjustable (common for all outputs)
Signal-to-noise ratio	55dB
Signal pre-amplification range (linear gain)	0 to 6.0db stepless adjustable (common for all outputs)
Temperature range	0 ~+50°C
Supply voltage	230VAC/50Hz
Power consumption	3watts
Housing	Steel metal

VDA-4A

(Continuation Specifications)

Colour	Pantone Cool Gray 1C
Dimensions (HxWxD)	44x108x135mm
Weight	600g

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

